


5 6100

Kreissägeblätter Aufnahmehalter – „Vorderseitige Aufspannung“
Circular saw blade retainer – front side securing

HSS

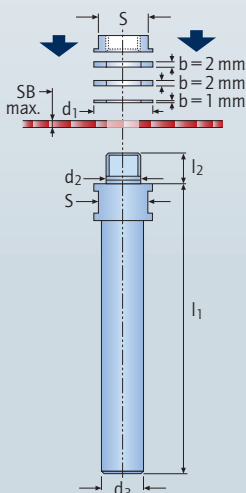

Art.	d2 h6	d3 h6	d1	l1	l2	SB max.	S
5 6100 03 05	• 3	5	5	60	8,0	3	4
5 6100 05 06	• 5	6	10	70	10,0	6	8
5 6100 05 06 075	• 5	6	7,5	70	7,0	3	6
5 6100 05 10	• 5	10	10	80	10,0	6	8
5 6100 06 10	• 6	10	12	80	10,5	6	10
5 6100 08 10	• 8	10	15	80	10,0	6	13
5 6100 08 12	• 8	12	15	90	11,0	6	13
5 6100 10 06	• 10	6	18	80	10,5	6	15
5 6100 10 10	• 10	10	18	80	10,5	6	15
5 6100 10 16	• 10	16	18	100	11,5	6	15
5 6100 13 16	• 13	16	22	110	12,0	6	19
5 6100 16 10	• 16	10	22	80	8,0	3	19
5 6100 16 20	• 16	20	26	120	13,0	6	22
5 6100 22 16	• 22	16	32	120	13,0	6	27

Lieferung wie abgebildet inklusive Mutter und Abstandsringe (1 × 1 mm, 2 × 2 mm)
Shipment as shown including nut and distance rings (1 × 1 mm, 2 × 2 mm)

Abstandsringe / Distance ring

Art.	d2	d1	b
5 6110 05 03 01	• 3	5	1
5 6110 05 03 02	• 3	5	2
5 6110 10 05 01	• 5	10	1
5 6110 10 05 02	• 5	10	2
5 6110 075 05 01	• 5	7,5	1
5 6110 075 05 02	• 5	7,5	2
5 6110 12 06 01	• 6	12	1
5 6110 12 06 02	• 6	12	2
5 6110 15 08 01	• 8	15	1
5 6110 15 08 02	• 8	15	2
5 6110 18 10 01	• 10	18	1
5 6110 18 10 02	• 10	18	2
5 6110 22 13 01	• 13	22	1
5 6110 22 13 02	• 13	22	2
5 6110 22 16 01	• 16	22	1
5 6110 22 16 02	• 16	22	2
5 6110 26 16 01	• 16	26	1
5 6110 26 16 02	• 16	26	2
5 6110 32 22 01	• 22	32	1
5 6110 32 22 02	• 22	32	2

Mutter / Nut


Art.	d2	d1	S
5 6111 03 04	• 3	4	4
5 6111 05 08	• 5	10	8
5 6111 05 06	• 5	7,5	6
5 6111 06 10	• 6	12	10
5 6111 08 13	• 8	15	13
5 6111 10 15	• 10	18	15
5 6111 13 19	• 13	22	19
5 6111 16 19	• 16	22	19
5 6111 16 22	• 16	26	22
5 6111 22 27	• 22	32	27

d2 = Sägeblattbohrung / Saw blade bore
d1 = Flanschdurchmesser / Flange diameter
d3 = Schaftdurchmesser / Shank diameter

5 6101

Kreissägeblätter Aufnahmehalter – „Rückseitige Aufspannung“
Circular saw blade retainer – rear side securing

HSS

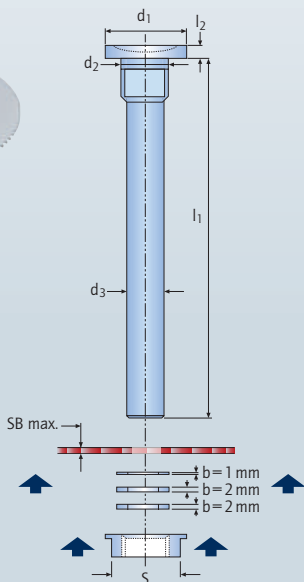

Art.	d2 h6	d3 h6	d1	l1	l2	SB max.	S
5 6101 05 04	• 5	4	10	50	2,0	6	8
5 6101 06 05	• 6	5	12	60	2,0	6	10
5 6101 08 06	• 8	6	15	70	2,0	6	13
5 6101 08 07	• 8	7	15	80	2,0	6	13
5 6101 10 06	• 10	6	18	70	2,5	6	15
5 6101 10 08	• 10	8	18	90	2,5	6	15
5 6101 13 10	• 13	10	22	110	2,5	6	19
5 6101 16 12	• 16	12	26	120	2,5	6	22

Lieferung wie abgebildet inklusive Mutter und Abstandsringe (1 × 1 mm, 2 × 2 mm)
Shipment as shown including nut and distance rings (1 × 1 mm, 2 × 2 mm)

Abstandsringe / Distance ring

Art.	d2	d1	b
5 6120 10 05 01	• 5	10	1
5 6120 10 05 02	• 5	10	2
5 6120 12 06 01	• 6	12	1
5 6120 12 06 02	• 6	12	2
5 6120 15 08 01	• 8	15	1
5 6120 15 08 02	• 8	15	2
5 6120 18 10 01	• 10	18	1
5 6120 18 10 02	• 10	18	2
5 6120 22 13 01	• 13	22	1
5 6120 22 13 02	• 13	22	2
5 6120 26 16 01	• 16	26	1
5 6120 26 16 02	• 16	26	2

Mutter / Nut

Art.	d2	d1	S
5 6121 05 08	• 5	10	8
5 6121 06 10	• 6	12	10
5 6121 08 13	• 8	15	13
5 6121 10 15	• 10	18	15
5 6121 13 19	• 13	22	19
5 6121 16 22	• 16	26	22

% Sonderpreis / Sale Artikel. Lieferbar solange Vorrat.
Special price / sale article. While stocks last.

d2 = Sägeblattbohrung / Saw blade bore
d1 = Flanschdurchmesser / Flange diameter
d3 = Schaftdurchmesser / Shank diameter